

Atmosphyre

Glass Bell Faucet

Counter top must be 1" (2.5 cm) thick or less for this faucet


Installation of Spout

- 1) Remove T fitting on the end of the spout (do not lose small black washer)
- 2) Remove the brass nut, metal U washer and large black rubber gasket
- 3) Place the spout base plate/ring onto threads of spout and slide up into position
- 4) Put threads down into hole in counter top
- 5) Put the large black washer, then metal U washer, then brass nut on threads under counter
- 6) Position the spout over the sink and then tighten down the brass nut under the counter top
- 7) Make sure small back washer is inside the T fitting and fasten T fitting onto the threads
- 8) Tighten down the T fitting snug but do not over tighten as it could cause a leak

You are now ready to install the glass bells

Installation Glass Bell Valves

- 1) Thread the brass nut down the valve to it reaches the end
- 2) Slide the washer over the valve down unto the nut
- 3) Insert the valve from under the counter top through the hole in the counter
- 4) Thread the base plate with the o-ring side facing up on the valve to hold the valve in place
- 5) Seat the glass bell onto the base (Chaude is hot, Froide is cold)
- 6) Thread the top plate onto the top of the valve until it stops
- 7) Place the handle on the valve and push all the way down, tighten both set screws
- 8) Thread the top plate up until it hits the handle, then turn it back away by a quarter turn
- 9) Thread the base plate up until it the top plate is touching the top of the glass bell
- 10) Turn the top plate clockwise slightly just to be sure it is compressing the glass bell on the o-ring
- 11) Tighten the brass nut below the countertop by hand only to secure the valve in place
- 12) Turn the faucet handle to the off position (back to the wall) until it stops
- 13) Rotate the valve from under the cabinets to where the handle is in just the right location
- 14) Tighten the brass nut under the counter top with a wrench but do not over tighten
- 15) Hook up water line to from the side port of the valve to the spout T under the counter top
- 16) Hook up water supply lines from wall shut-offs to the bottom port on the valves

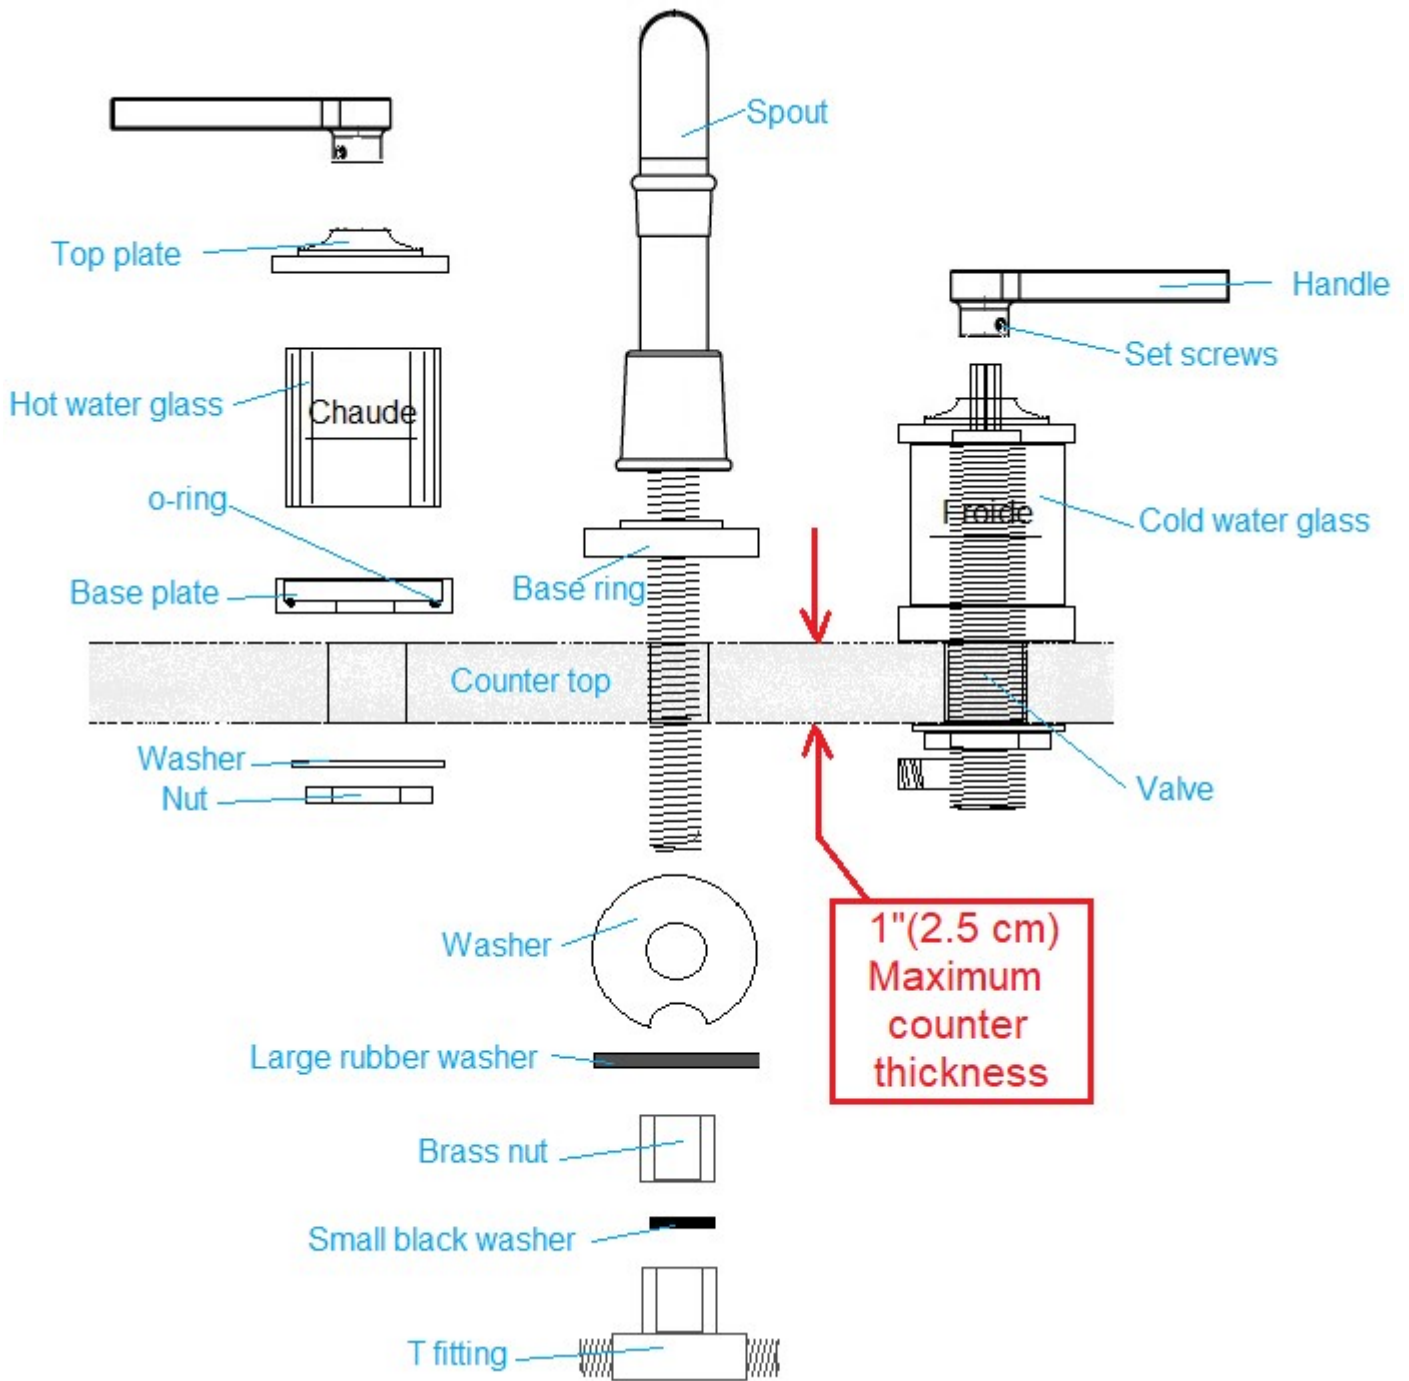

www.atmosphyre.com

518-655-0126

support@atmosphyre.com

2706 New Scotland Road Voorheesville, NY 12186